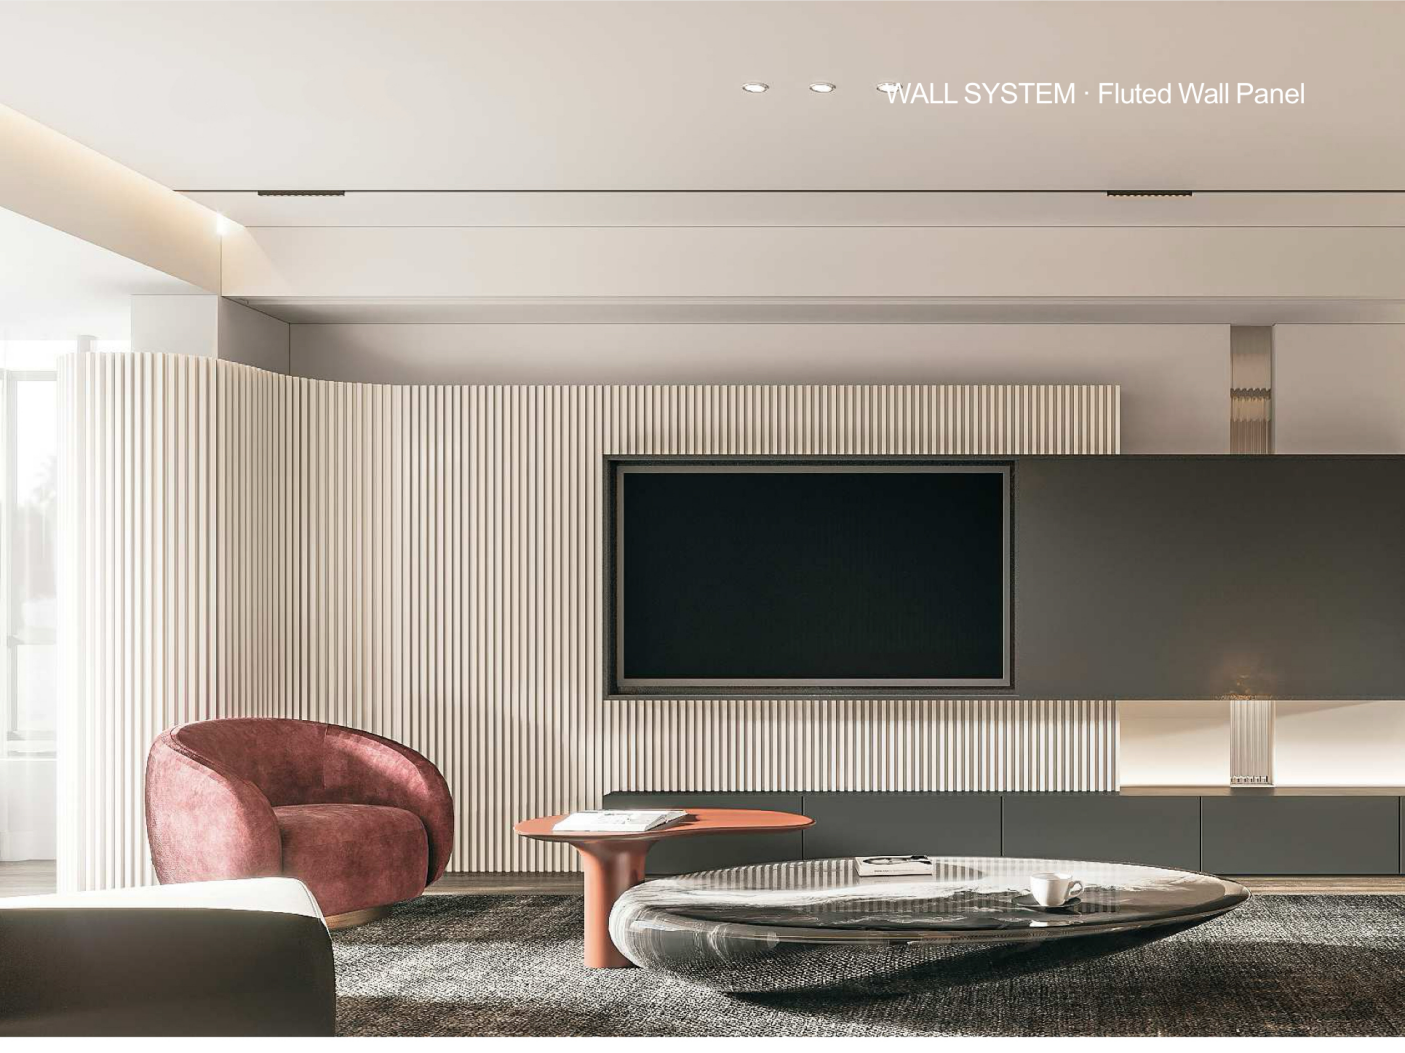


FLUTED WALL PANEL

The wooden grid based on nano bamboo and wood fiber replaces the traditional wooden grid, which is more environmental friendly, moisture-proof and does not deform.

The traditional wooden grid will be moldy and deformed after it is used for a long time.The cost is very high and is not environmental friendly.

Now, the advantages of using nano bamboo and wood fiber material are: environmental protection, waterproof, moisture-proof, mildew proof, moth proof, no deformation, various colors, light, installed, clean, firm, durable and nice appearance.

It is very popular by lots of customers as soon as it accesses to the domestic and overseas market!



Waterproof

Insect prevention

E0

Environmental protection


B1

Flame-retardant

HOLLOW GRID PLATE




Name: 170 Hollow fluted wall panel



Length and width: 170*3000 (mm)
Thickness: 23.5mm
Environmental protection grade: E0
Fire rating: B1




Name: 100 Arc fluted wall panel



Length and width: 100*3000 (mm)
Thickness: 19.5mm
Environmental protection grade: E0
Fire rating: B1




Name: 157 Inner arc grille




Length and width: 157*3000 (mm)
Thickness: 18.5mm
Environmental protection grade: E0
Fire rating: B1




Name: 150 Arc fluted wall panel



Length and width: 150*3000 (mm)
Thickness: 15mm
Environmental protection grade: E0
Fire rating: B1

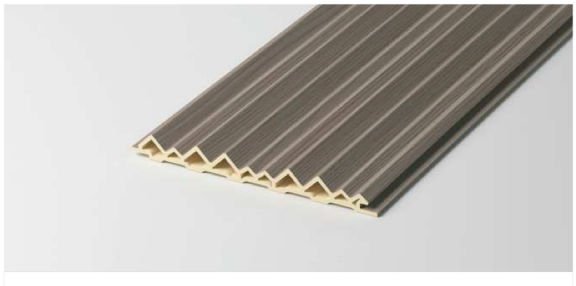


Name: 160 triangular grille



Length and width: 160*3000 (mm)
Thickness: 15mm
Environmental protection grade: E0
Fire rating: B1



Name: 115 Wave fluted wall panel




Length and width: 115*3000 (mm)
Thickness: 13mm
Environmental protection grade: E0
Fire rating: B1

SOLID GRID PLATE




Name: 153 * 24 solid fluted wall panel



Length and width: 153*3000 (mm)
Thickness: 24mm
Environmental protection grade: E0
Fire rating: B1




Name: 110 * 18 solid fluted wall panel



Length and width: 110*3000 (mm)
Thickness: 18mm
Environmental protection grade: E0
Fire rating: B1




Name: 40 Inner arc solid grille



Length and width: 40*3000 (mm)
Thickness: 15mm
Environmental protection grade: E0
Fire rating: B1




Name: 70 Inner arc solid grille




Length and width: 70*3000 (mm)
Thickness: 15mm
Environmental protection grade: E0
Fire rating: B1




Name: 120 * 9 solid fluted wall panel



Length and width: 120*3000 (mm)
Thickness: 9mm
Environmental protection grade: E0
Fire rating: B1

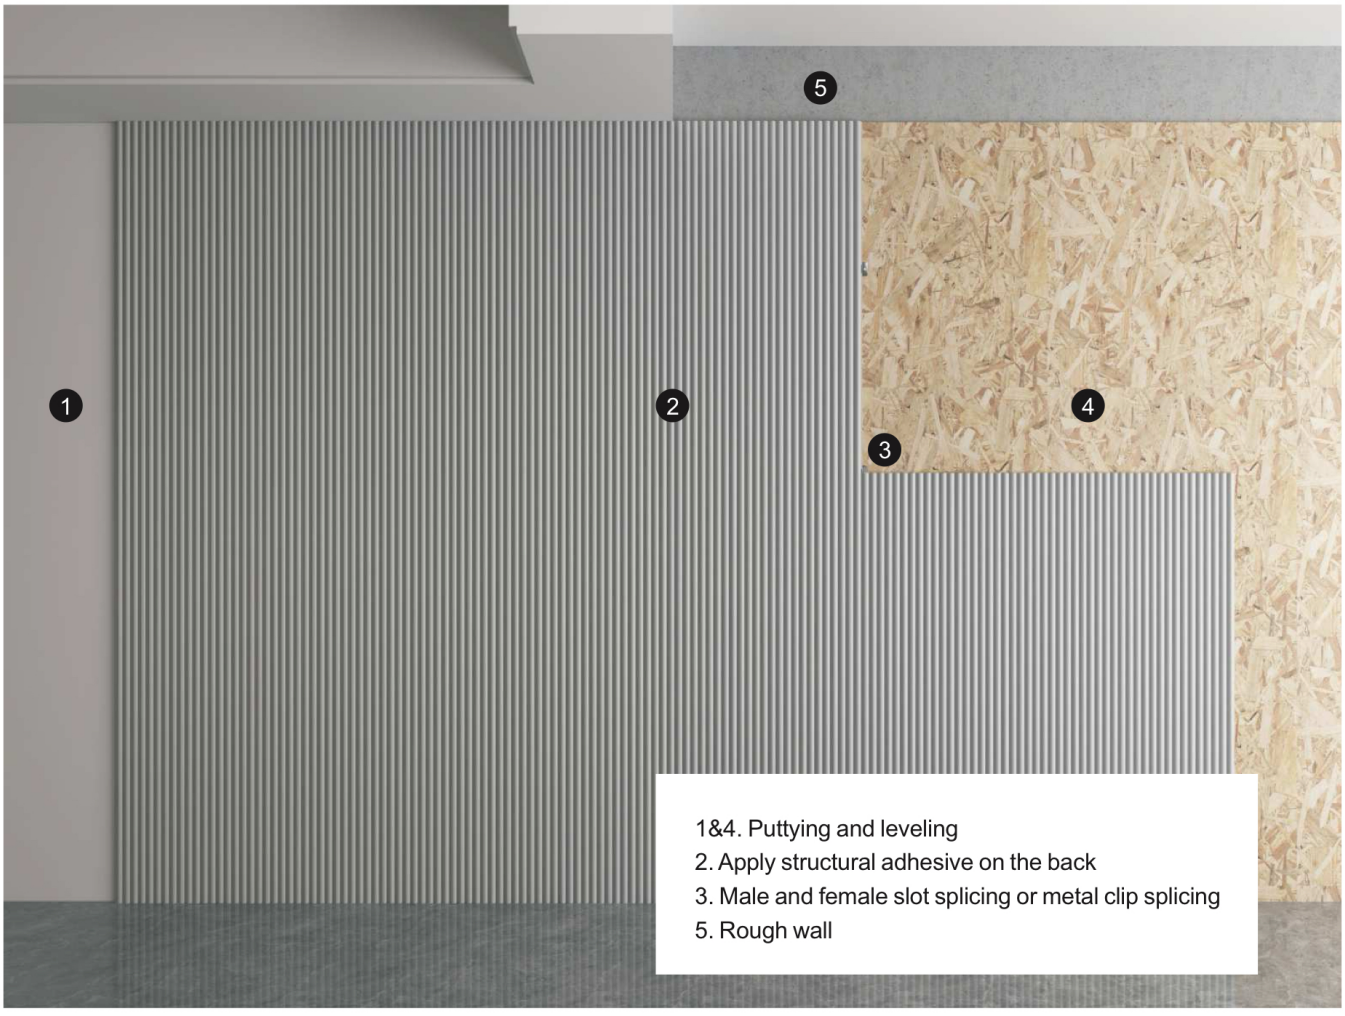

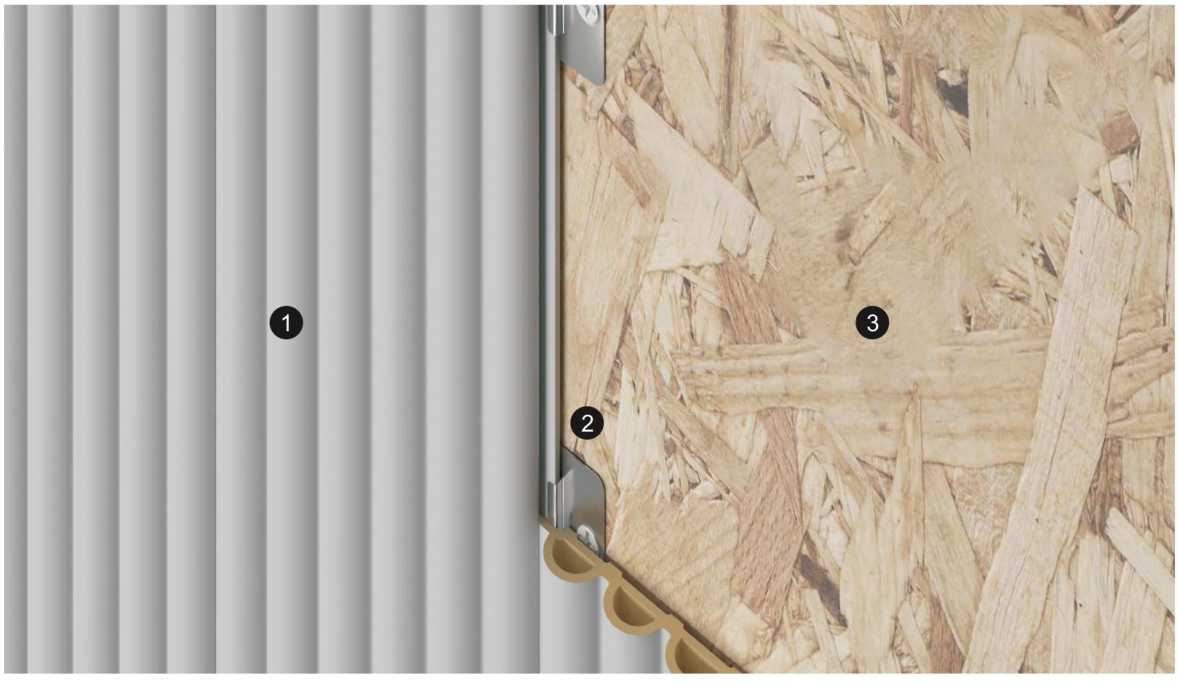

1. Apply structural adhesive on the back
2. Male and female slot splicing or metal clip splicing
3. Puttying and leveling

COLOUR - Metal series




COLOUR - Metal series

Thickness: 0.15mm



BJX703

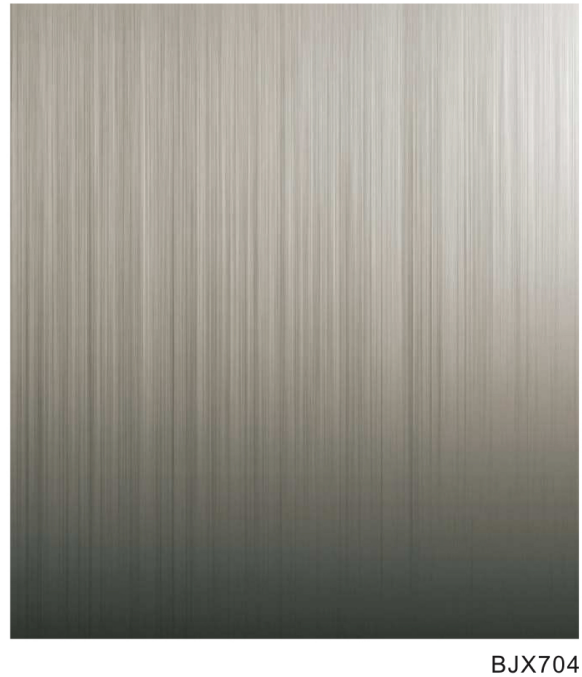


BJX704

COLOUR - Wood grain series







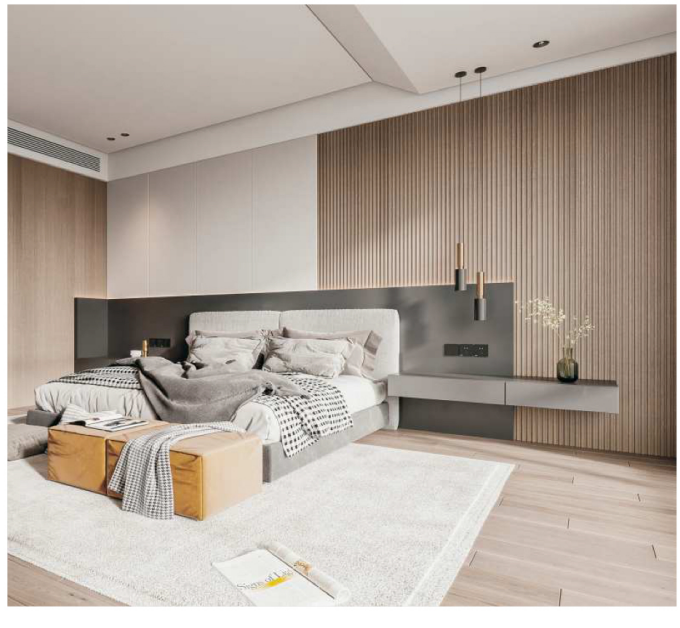

COLOUR - Wood grain series

Thickness: 0.14~0.18mm


8006


81031


81033


81050


81051


8002


8066


81037


81032


8021


81017


8070


8007


8005


8008


81039


81041


81046


8058


81027


81003


8031


81009


81038

COLOUR - Wood grain series

Thickness: 0.14~0.18mm


81026


81012


81024


81010


8011


8032


8025


81005


81007


81013


81015


81043


8022


8014


8004


8034


8059


81011


81045


8055


8036

COLOUR - Wood grain series

Thickness: 0.14~0.18mm



81001



81002

81029



81030



81025



8037




81008



8045



81018

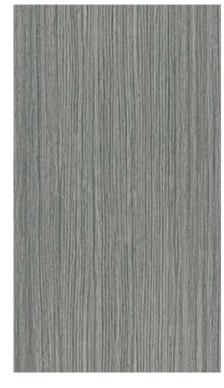

8018



8023



8035




81028




8009



8019

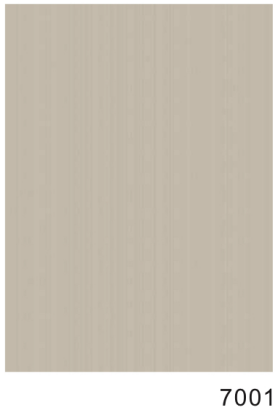

7001

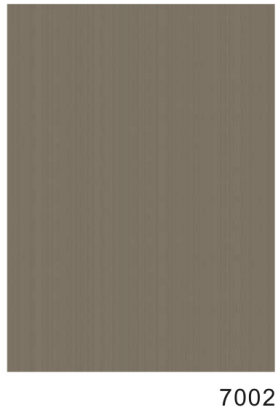

7002



7005



7006




COLOUR - Stone series

Thickness: 0.16mm



5007

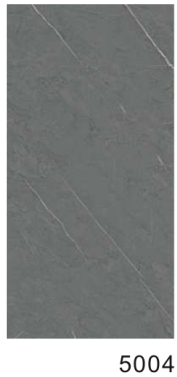

5004




5023



5018



5029

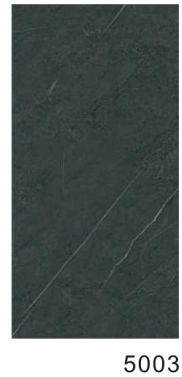

5003



5026




5010



5017



5020

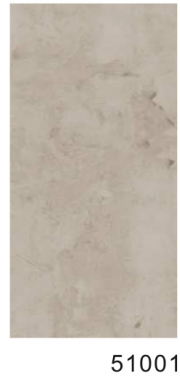

51001



51003



COLOUR - Cloth pattern series

Thickness: 0.14~0.16mm



6062



6063



6001



6003



6004



6005



6009



6061



6014



6065



6066

COLOUR - Solid color series









COLOUR - Solid color series

Thickness: 0.14~0.18mm

3021

3036

3001



3038



3040

3022


3041

3042


3037




3002

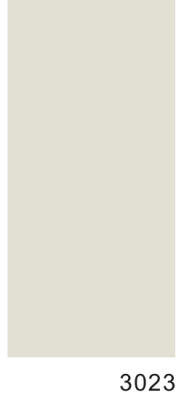

3023

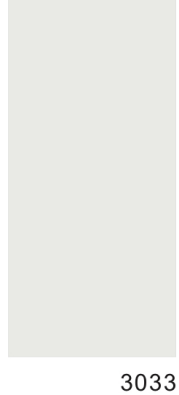

3033

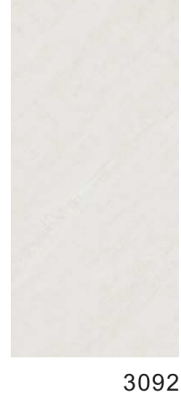

3092



3064




3026



3081



3015

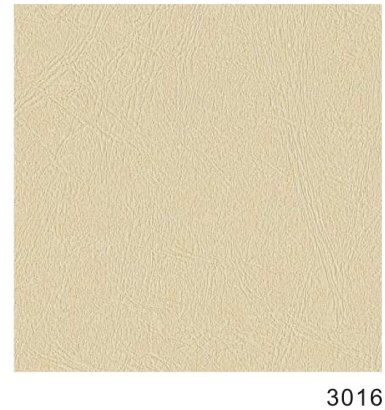

3016

COLOUR - Solid color series

Thickness: 0.14~0.18mm




31005



31002




31003

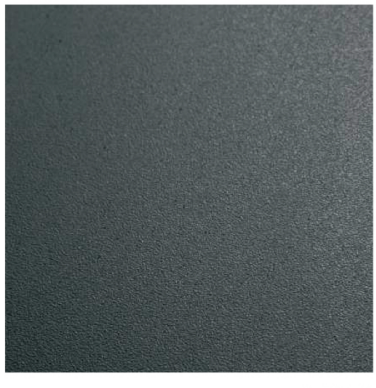

31006



31007

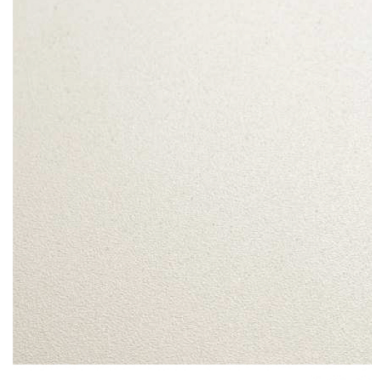

31009



3035




3062



3030



3082

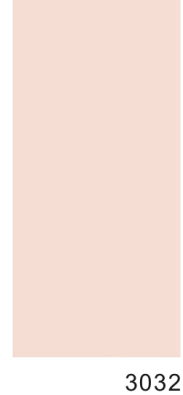

3032




3029



3061



3083

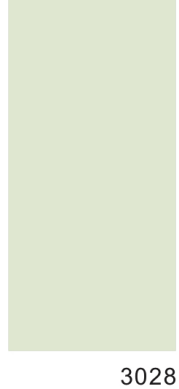

3028



3063



3003



3065